

DS808A

DMX DIMMER 4CH 230V

www.luxom.be

FUNCTIONAL DETAILS OUTPUT


Number of outputs	4
Output type	Dimmable
Output	5A per channel (total 12A max.)

TECHNICAL DESCRIPTION

Power supply	110V / 230V
Installation	DIN-rail
Input	DMX 4 channel, start address adjustable

GENERAL

Warranty	2 years on exchange
Operational temperature	0 - 40° C
Dimensions WxHxD	190(W) x 88(H) x 57(D) mm
Weight	590 g

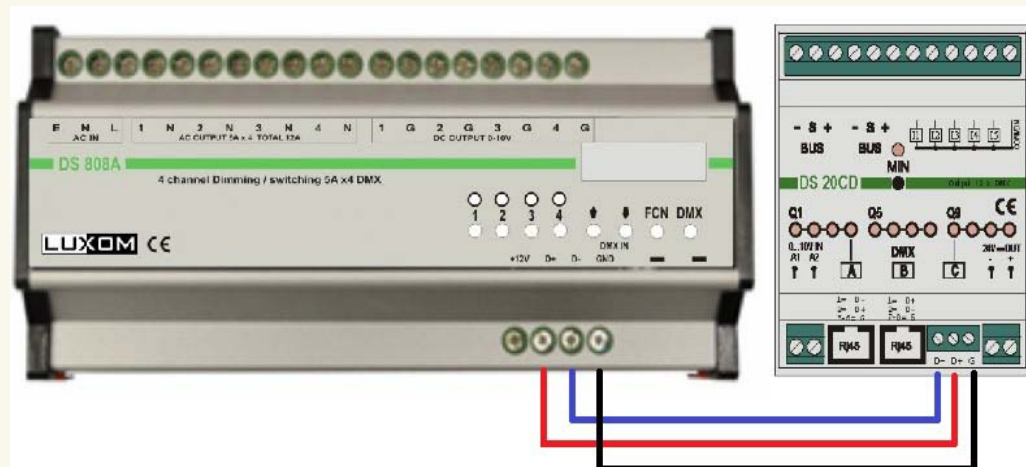


- dimmer with 4 outputs : each channel can control an AC output or a 1-10V output for CFL dimming.
- DMX 4 channel input with (RJ11) connection to connect the next dimmer.

DS804A

DMX DIMMER 4CH 230V

www.luxom.be

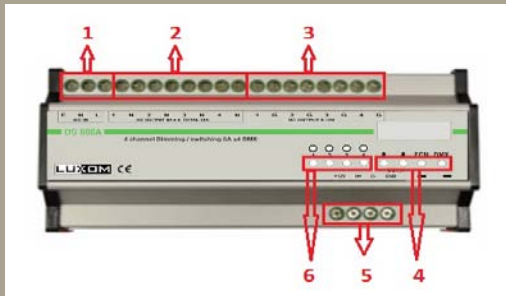

Start channel setting

STEP-1 : Hold **【DMX】** and then press **【▲】** or **【▼】** to set the DMX IN start channel address. For example, press **【▲】** , LED displays,

8002

In the DMX IN mode, the first dot is blinking means the DMX signal inputs.

8.001

Setting the input type

DS808A can control normal dimming lamp, non-dimming lamp and DC dimming fluorescent lamp. Please make sure select right output mode to avoid the damage of the lamps.

STEP-1 : Hold **【FCN】** until LED displays,

ALFF

AL: It means all channels.

F: It means 0 – 10VDC fluorescent lamp.

STEP-2 : Press **【▲】** or **【▼】** to choose all channel's output mode .

ALES ALd

S: It means switching (SWITCH)

d: It means dimming (DIMMER)

STEP-3 : If you would like to set the output mode for individual channel, press **【FCN】** to choose a channel then press **【▲】** or **【▼】** to choose output mode.

1	AC power supply connector
2	AC power output connector
3	DC power 1-10V output
4	Function keys 【▲】 【▼】 【FCN】 【DMX】
5	DMX input connector
6	Instant output keys 【1】 【2】 【3】 【4】